

TM99 小振膜话筒

- 可互换心型、超心型和全指向咪头
 - 中频平直，高频稍有提升，语音清晰，真实
 - 金属材质绒面座体，小巧，美观耐用
 - 48V 幻象电源供电
 - 特配以镀金的 XLR 连接片，使音频电流得到理想传输
-
- Interchangeable with cardioid, hyper-cardioid and Omni sound heads
 - Straight intermediate and advanced high frequency make the sound clear
 - Brass shell paint by special flannel lacquer, which makes the products beautiful
 - 48V phantom power
 - The gold plated XLR link makes audio frequency current with ideal transmission


TECHNICAL PARAMETERS 技术参数

单体	背极式驻极体
指向性	超心型指向性
频率响应	30Hz-18KHz (±3dB)
灵敏度	-33dB ±3dB
输出阻抗	600Ω ±20%
等效噪声级	≤25dBa
最大声压级	130dB
信噪比	≥ 78dB
使用电源	48V 幻象电源 (48V DC) 2mA
重量	73.5g (不含附件)
本体尺寸	Φ20mm×105mm
输出接口	XLRM 三针公卡侬

MEASUREMENT ENVIRONMENT 测量环境

温度 Temperature: 29° C
相对湿度 Relative Humidity: 60%
气压 Pressure: 102kPa
环境噪声 Ambient Noise: ≤ 32dBA


POLAR PATTERN 指向性



MEASURING EQUIPMENT 测量设备

音频分析仪 Audio Analyzer: Audio Precision APx515
扬声器 Speaker: 真力 GENELEC® SAM™ 8361A Three Frequency Coaxial
Intelligent Monitor Speaker 三分频同轴智能监听音箱

FREQUENCY RESPONSE 音频曲线

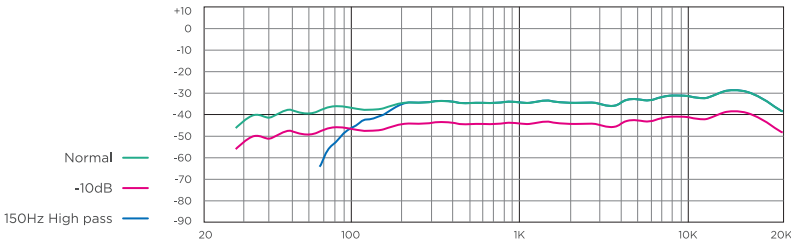

TM 多用途桌面拾音系列